



15" YESS LCD TV

High quality Motorhome, Caravan and Marine LCD TV. Automatic channel searching/tuning. Fully Functional Remote Control. Base has a carry handle for easy transportation between house and vehicle. 1x AV input. 1x VGA Plug (for use as PC screen). 1x S Video Plug. 12v and 230v. Power Consumption 25watts

Dimensions:
 SCREEN: 470 W x 280H x 55 D (mm)
 HEIGHT WITH BASE: 330mm
 FLATWALL BRACKET: 140 W x 130H x 20 D (mm)

1510-029K 15" YESS LCD TV

Low Power Consumption




Pictured Left:
Flat wall mounting Bracket included.

"As you know, the quality of LCD TV is up to the Panels. Our panels are from NEC which is the top panel maker in the world. Our tuners cover 100% full frequency range and pick up the signals perfectly. Our screens are an LCD TV and MONITOR and are suitable for portable use in Motorhomes and Caravans."

Jim Sheng
Director Yess Av

LCD TV BRACKETS


- Will support LCD TVs up to 10kgs in weight
- Is compatible with most brands of LCD TV with a screw pattern of either 100mm or 75mm. Different screw patterns can be drilled to suit.
- 360° Screen Rotation
- Adjustable Display Positions– Right/Left and Up/Down
- Heavy duty mounting screws included
- Adjustment tool– *For a more permant fixture*



1510-060 Adjustable Knuckle Joint



1510-052 Long Dual Arm with Knuckle Joint
Maximum Extension - 410mm

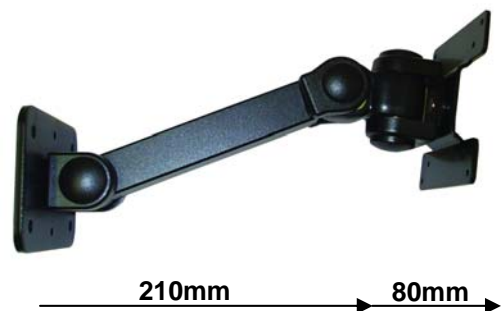

1510-050 Short Single Arm with Knuckle Joint
Maximum Extension - 290mm



SERADA



DVD PLAYER - Built In Car Stereo Size

Plays DVD, VCD, CD-R/RW, CD-DA, MP3, AM/FM RADIO

Features includes fully functional remote control, permanent 12v installation cable (fused), 30 radio station storage (18FM and 12AM), High power output 45x4, RCA output , 12v DC 8 watts.

Colour - Dark grey with red and blue display

Installation Size - W170 mm D183 mm H70 mm

1510-041 12V Dvd Player

Security in Motorhomes and Caravans is paramount. Our DVD player has a Detachable Face Plate for added security.

NEW



SPEAKERS!

BOSCHMAN SPEAKERS

Pure Titanium Dome system. Long throw acoustic design. Sensitivity-improved music reproduction. Cable and installation brackets included. Discrete black finish.

SA4440-005 100mm (4") Speakers Pair

SA4440-008 165mm (6.5") Speakers Pair

	SA4440-005 4"	SA4440-008 6.5"
Peak Power Output	180watts	350watts
Continuous Power (input)	150rms	90rms
Nominal Impedence	4ohms	4ohms



12V VACUUM CLEANER

With Brush and Crevice

SA419




VACUUM CLEANER WITH AIR PUMP

Pump max. pressure 300lb/inz. 12VDC

SA419P



TELEVISION AERIALS

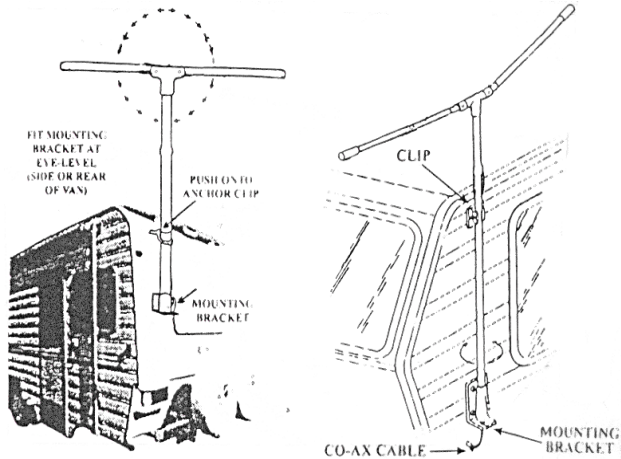


KIWI TRAVELLER

For V.H.F, U.H.F, S.B.S, F.M

- SA811F** Folding Motorhome Antenna
- SA810FK** Folding Antenna Including SA539

SA811F is supplied in a reusable tube for easy and compact storage.

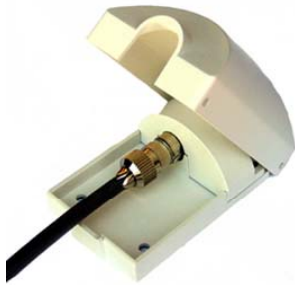

EXTERNAL SOCKET

For outside TV cable

SA539



VISION PLUS

Signal booster is fully wideband for T.V and FM radio transmissions. Twin outlets allow 2 televisions and/or radios. Frequency Range UHF 470-860 Mhz, VHF 40-230 Mhz, FM 88-108Mhz. Amplifier gain 17db. Output impedance 75 ohms. Power supply 12-24VDC and consumption 40 ma. Dimensions 115 x 70 x 50mm.

Note: DO NOT USE WITH OMNI-DIRECTIONAL OR AMPLIFIED TV AREIALS

SA537



HAIR DRYER - 12V DC

Power consumption 156 Watts.

SA418




OSCILLATING FAN - 12V DC

150mm fan with built in on-off switch.

SA1109



BATTERY MANAGEMENT

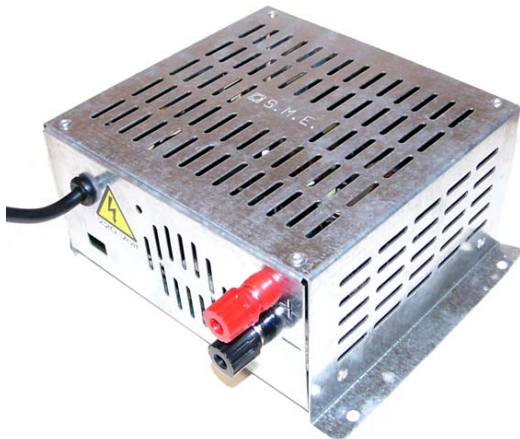

SMART CHARGERS

Switched mode technology, fully automatic. Capable of supplying power to charge batteries and supply the 12V Accessories. Output voltage is set at 13.8V and remains stable as the load drawn from accessories is altered. Battery overcharging and gassing is eliminated as the output voltage cannot increase above this level. Power factor corrected, EMC compliant.

SA372	12V	16 Amp
SA370	12V	20 Amp
SA3702	12V	30 Amp
SA3703	12V	60 Amp
SA3700	24V	7 Amp
SA3701	24V	10 Amp



MEGAPULSE MKIII

In operation cycles of lead acid batteries, the sulphur molecules transfer energy between the negative and positive plates creating power. When the sulphur molecule is totally discharged it changes into lead sulphate and bonds to the plates, over time they will crystallize forming an insulating barrier around the plates choking the battery until it fails. By pulsing a controlled DC current back into the battery along with the incoming charge it has been proven in scientific tests around the world that Pulse Technology reverses the sulphation effect resulting in batteries being maintained in optimum condition and achieving maximum service life.

- Electronic high/low activation switch
- 2 led battery test display
- High impact waterproof casing
- Solid state electronics
- Mounting flanges

SA1690-001 12 Volt





'DUAL SENSE' VOLTAGE SENSITIVE RELAY

The Dual Sense VSR supersedes the single sensed unit by allowing the voltage of both battery banks to be monitored. If either battery bank is receiving a charge the VSR will parallel the two battery banks. The Dual Sense unit is designed for situations where a 230 volt battery charger or second charging source is used into the house battery bank.

H 69mm W 69 D 50mm

CP12DF Dual Sense Voltage Relay 140amps
CP24 Charging systems up to 140 amps/24V



24 VOLT TO 12 VOLT CHARGE EQUALIZER

Simple 3 wire design . Battery level LED display. Capable of 12V 30 amps continuous output. Output voltage adjustable between 13.2V and 14.8V. Starts up when vehicle charge rate is 26.5V or higher. Back-feed diode protection, prevents 12V leakage back into the 24V system via the unit. Integrated 30A fusible link. Require for installation a 50 AMP relay

SA113 30 Amp
SA113R-R 50 Amp Relay (required for installation)



24v to 12v VOLTAGE REDUCER

SA112 10 Amp
RV-DC20 20 Amp

NEW RATINGS



DEEP CYCLE BATTERY

ENDURANT CYCLEMASTER Is a high integrity deep cycle battery. With plate grids ranging from 2.2mm to 5mm in thickness plus glass-mat separators and hot-melt cell group bonding, this robust construction provides a good cycle life and resistance to corrosion when subjected to top of charge and float duty charging voltages. The Endurant cyclemaster range has proven to be extremely reliable in a variety of conditions.

US85	12V	85A/Hrs	L:270mm	W:170mm	H: 250mm	Weight 19Kg
US105	12V	105A/Hrs	L:318mm	W:170mm	H: 250mm	Weight 22Kg
US130	12V	130A/Hrs	L:330mm	W:171mm	H: 263mm	Weight 31Kg
US220	6V	220A/Hrs	L:260mm	W:180mm	H: 279mm	Weight 29Kg
US375	6V	375A/Hrs	L:298mm	W:178mm	H: 419mm	Weight 51Kg



BATTERY HOLDER

Resistant to gasoline and acids, c/w carry strap and nylon buckles for fastening.

SA1033 Small white L 280 H 270 W 190mm
SA1033B Med. Black L 340 H 270 W 190mm
SA1034 Large yellow L 450 H 270 W 190mm



SERADA



VOLT METER

RV114 12V
RV116 24V



DC MONITOR "the fuel gauge for your batteries"

Displays Volts on up to 3 battery banks
Change and discharge of amps (house battery only)
Low Amp hour alarm
High/low voltage alarm on all battery banks
Suitable for monitoring amp hours remaining on battery banks with a capacity between 60 & 3000 amp hours (house bank only)
Back light for night use
Power supply 10 - 35VDC.
Supplied with 450a-50mv shunt

RV117

For the monitor to give accurate readings we recommend that you use the twisted cable below:

RV117-C5 5 mtr twisted cable
RV117-C10 10 mtr twisted cable



AMP METER

RV106 0 - 10 Amp
RV108 0 - 20 Amp



DIGITAL DC VOLT METER

Monitors voltage on up to 3 battery banks, High/Low voltage alarm, Back light. Power supply 10 - 35VDC.

RV118



12 VOLT SOCKET AND ANTENNA JACK

SA1395 Single



SWITCH PANEL

RV102 6 switches 12V
RV104 6 switches 24V



Label sheet supplied with switch panel
Sold Separately: RV102L



12 VOLT SOCKET AND PLUG

SA395 Socket only
SA394 Plug only
SA765A Socket Surface Mounted Case



12 VOLT SOCKET AND ANTENNA JACK

SA1396 Double



GAS DETECTORS



CARBON MONOXIDE GAS ALARM

Supplied with wall bracket, battery operated.

Diameter 140mm Height 35mm


SA1472



12VOLT LPG DETECTOR

Surface mount: Width 76mm Depth 30mm Height 95mm
 Flush mount: Width 98mm Depth 24mm Height 117mm

SA1470 Surface/flush wall mounted 12V LPG detector

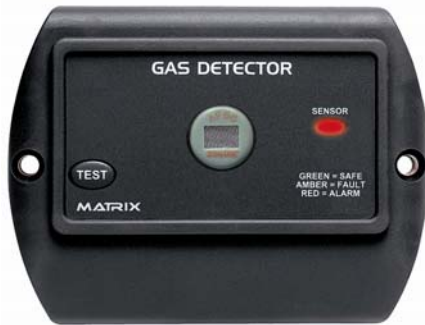


12/24 VOLT LPG DETECTOR

Uses the same sensor as the RV109. The sensor is mounted in the front of the fascia creating a stand alone unit. The unit is designed to be installed at the lowest point in the vehicle. The detector is equipped with a test button and a sensor status light. 12/24volt.

Dimensions 66.5H x 88W x 17D

RV110 Surface Mount with Inbuilt Sensor

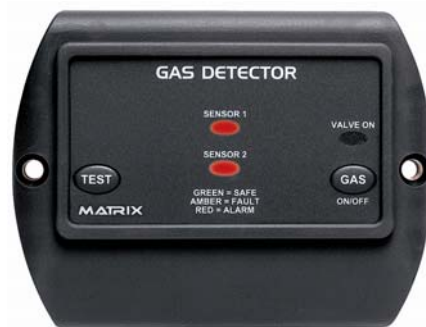

12/24 VOLT LPG DETECTOR

- Self testing capability
- Microprocessor control
- Provision for external alarm
- Automatic shut-off solenoid control (**SA138K sold separately**)
- Dual sensor capability. Supplied with one sensor, second sensor sold separately (**RV109S**)
- 12/24volt.

Dimensions 66.5H x 88W x 17D

RV109 Surface Mount with External Sensor

RV109S Extra Sensor



SERADA

NEW



BATTERY MASTER SWITCH

This battery master switch has a number of unique features. The highlights being the locking system, allowing it to be a stand alone unit, or locked together with other switches. It also features a control knob which cannot be removed whilst in the ON and OFF position. It can, however be removed by switching to an anti-clockwise 45° position. The control knob also features an interchangeable labeling system allowing a full range of applications. The switch also includes a self cleaning sliding contact along with a removable rear cover insulating the rear terminals. It can be either surface or recess mounted by cutting 52mm hole.

Specifications:

Continuous Rating: 275 Amps DC
Intermittent Rating: 455 Amps DC
Operation: ON/OFF
Termination Stud Size: 2 x 10mm

RV271 Battery Master Switch



12 VOLT SWITCHES

Width 50mm Depth 50mm Height 25mm

- 3069-355** White Single
- 3069-356** Beige Single
- 3069-358** White Double
- 3069-359** Beige Double



SOCKET

Female socket c/w battery terminal clips.

SA781



CHROME INTERIOR SWITCHES

Can be surface or recessed mounted. Switches have a back-lit label with "Systems On" indicator. H 90 x W 30 x D18 mm

- RV1100** Single Switch
- RV1101** Double Switch

Tank Monitors Fresh Water, Grey Waste, Black Waste

NEW



WATER TANK MONITOR

12VDC, panel 87mm x 68mm

SA374



WATER TANK MONITOR

Battery operated. Supplied in Retail Pack

SA942



WATER TANK MONITOR

Easy installation. Fits existing water tanks. No removal of water tank required. Complete with all hardware. Battery operated. Supplied in Retail Pack.

- 3573-050** Black –Tank Sender Arm for shallow tank. 7.5m lead
- 3573-048** Black –Tank Sender 5 Probes for deep tank 7.5m lead



SINGLE TANK MONITOR

RV301

Sender units sold separately
Refer RV-TS and RV-TSPK



TWIN TANK MONITOR

RV302

Sender units sold separately
Refer RV-TS and RV-TSPK



TRIPLE TANK MONITOR

RV303

Sender units sold separately
Refer RV-TS and RV-TSPK

Tank Monitors

Fresh Water
Grey Waste
Black Waste



DEEP TANK SENDER KIT

5 Probe set. Suitable for Plastic Tanks

RV-TSPK



TANK SENDER

Max. tank depth 280mm. Max. wall thickness 10mm. 5 metre cable. Suitable for Plastic and Stainless Steel tanks.

RV-TS



MICRO 1 TANK MONITOR

Single tank and pump switch.

Width 120mm Height 100mm

SA944 Holding tank monitor

SA945 Fresh water monitor

SA945S Fresh water/pump switch (illustrated)



MICRO 2 TANK MONITOR

2 tanks and pump switch.

Width 120mm Height 100mm

SA943A



MICRO 3 TANK MONITOR

3 tanks, battery monitor and pump switch.

Width 120mm Height 100mm

SA943B



SERADA

NEW



LED

'LED' PINTO DOWNLIGHT

12 LEDS. 12volt
W 80mm x H 30 mm

- SA1623 Chrome
- SA1624 Gold



MARS RECESSED LIGHT

W 120mm x H 25mm
10W Halogen

- SA1625 Chrome
- SA1626 Gold

NEW



NEW

LOTS RECESSED LIGHT

W 75mm x H 22mm
10W Halogen

- SA1628 Chrome non switched
- SA1629 Chrome Switched



DOWN-LIGHT ANGLED

Halogen 10 W bulb. With Switch
Dia. 80mm Height 50mm

- SA090 Silver Sand
- SA091 Satin Silver



HALOGEN RECESSED

12V 10W. Width 90mm Height 65mm

- SA889 With switch



HALOGEN SURFACE / RECESSED MOUNT

12V 10W. Dia.65mm

- SA797



SATURN- Surface or Flushmount

Halogen 10W bulb. With Switch
Height 28.8mm Dia. 79mm

- SA3307 Satin grey
- SA3308 White
- SA3309 Silver sand



HALOGEN SWIVEL

12V 10W. Dia. 120mm Height 60mm

- SA909 Indent Only



HALOGEN SURFACE MOUNT

12V 10W. Width 90mm Height 65mm

- SA898



HALOGEN FLUSH MOUNT

Dia. 69mm Depth 22mm

- SA1383 Chrome (Indent)
- SA1384 Gold (Indent)



HALOGEN RECESSED - BRASS

Dia.117mm

- SA747 12V Indent Only





Think Bright Think



STAR - RECESSED

5W. Height 26mm Dia. 70mm

- 3023-361 White
- 3023-461 White*
- * with switch



STAR - SURFACE MOUNT

5W. Height 26mm Dia. 70mm

- 3023-465 White* Indent
- 3023-466 Gold* Indent
- *with switch



SUN

10W. Height 36mm Dia. 110mm
With Switch

- 3023-325 White - Indent Only



COMET - SURFACE MOUNT

10W. Height 33mm Dia. 100mm

- 3023-492 White



COMET - RECESSED SWIVEL LIGHT

Halogen 10W bulb.

Height 31mm Dia. 80mm

- 3023-496 White - Switched
- SA1622 Chrome - Switched
- SA1621 Gold - Switched



TARGA - WATERPROOF

Halogen 10W bulb.

Height 40mm Dia. 90mm

- 3023-398 White
- 3023-399 Chrome Indent Only



PINTO - RECESSED

Halogen 10W bulb.

Height 33mm Dia. 76mm

- 3023-371 White without switch
- 3023-372 Gold without switch
- 3023-373 Chrome without switch
- 3023-471 White with switch
- 3023-472 Gold with switch
- 3023-473 Chrome with switch



NOVA - RECESSED

Halogen 10W bulb.

Height 25mm Dia. 76mm

- 3023-315 White without switch
- 3023-316 Gold without switch
- 3023-317 Chrome without switch
- 3023-415 White with switch
- 3023-416 Gold with switch
- 3023-417 Chrome with switch



SERADA



MINI SPOTLIGHT 12V

Halogen 10 W bulb.
With Switch

SA092 Silver Sand



TWILIGHT

Halogen 2 x 10W bulbs.
L 160mm W 50mm H 35mm

3023-547 White
SA1627 Silversand



UNILIGHT

Length 162mm Width 50mm

10W. White with opal lens.

3023-543



MINI SPOT

10W. Height 90mm Width 60mm Depth 85-120mm

3023-307 White
3023-308 Gold
3023-309 Chrome
3023-313 Silver sand



BAY SPOT WITH SWITCH

10W. Height 110mm Width 50mm
Depth 110mm

3023-305 Brass
3023-306 Chrome



MINI SPOT WITH SWITCH

Glass cover, 10W halogen bulb,
Polycarbonate body.

Height 90mm Width 55mm Depth 85mm

SA3316 White –Retail Pack
SA3318 Silver sand –Retail Pack



DREAM WITH SWITCH

Brass trim, 5W Halogen bulb.

Height 80mm Width 68mm Depth 75mm

3023-318 White
3023-319 Silver sand



ADJUSTABLE READING LIGHT

Brass, 10W halogen bulb.

Height 120mm Base Dia. 86mm

SA1136



EXTERIOR WATERPROOF LIGHTING

NEW



LUMO AWNING LIGHT

W 255mm x H 90mm x D 55mm
10W Halogen

Surface mounted and fully waterproofed. Waterproof to IP65. 12v.

3023-010 White



EXTERIOR WET LOCATION LIGHT

Clear lens

Length 147mm Width 79mm Depth 38mm

SA4100




EXTERIOR AWNING LIGHT

Clear lens

W 150mm D 50mm H 90mm

3023-605 Switched
3023-603 Non Switched



WATER PROOF AWNING LIGHT

SA468 12 Volt 21W



SKY LIGHT

Waterproof, opal lens, 2 x 10W bulbs. Height 40mm Width 200mm Depth 105mm.

3023-397 White



INTERIOR FLURO LIGHT

L 375mm W 55mm H 22mm

SA3303 Splash proof Single tube



HALOGEN REPLACEMENT BULBS

3038-550 12 Volt 5 Watt
SA1725 12 Volt 10 Watt
SA1727 24 Volt 10 Watt



FLURO LIGHTING

LAVA LAMP

A modern design. Opaque Lens. One 8 watt single fluorescent tube and built in switch.
Length 440mm Width 63mm Height 30mm



LUMO 1

Length 375mm Width 55mm Height 22mm

SA3301 Lumo 1

SA3303 Lumo 1 with backing plate (Splashproof)



LUMO 3

Length 375mm Width 85mm Height 27mm

SA3305 Double tube

SA12891 Backing plate sold separately



LUMO 2000 SERIES - ELLIPSE FLURO

Length 420mm Width 100mm Height 32mm

SA3310 Brass

1X8W Tube

SA3311 White

1X8W Tube

SA3322 White

2x8W Tubes

SA3312 Silver Sand

1X8W Tube

SA1497 Satin silver

1X11W Fluro

SA3312A Satin silver

2X8W Tubes



FLURO LIGHT - DOUBLE

Twin 8W tubes. 24V

Length 380mm Width 65mm Height 30mm

SA1117



SLIMLINE

SA1128 Single 8W 12V L357 W50 H28mm



FLURO LIGHT FITTING

Switch between 1 or 2 8 watt tubes.

Length 360mm Width 55mm Height 42mm

3024-250





DOME LIGHT

Stainless steel 304, Dia. 110mm, 12V Bulb, heat resistant glass.

SA748 125mm
SA1118 100mm



CIRRO WITH SWITCH

10W. Height 48mm Dia. 250mm

3023-338 White clear lens
3023-339 White opaque lens
3023-341 Gold opaque lens
3023-342 Silver Sand opaque lens

(Clear or opaque lens on request)



CORONET

SA3313 Brass 10w Halogen
SA3314 White 10w Halogen
SA3315 Satin Silver 9w Fluro



FLURO LIGHT FITTING

Twin 15W tubes, Switched.
Length 610mm Width 165mm Height 50mm
White with opaque lens

3024-431 Surface Mount
3024-438 Recessed Mount



FLURO LIGHT FITTING

Single 15W tube, Switched.
Length 400mm Width 80mm Height 30mm
White with Opaque lens

3024-426 Surface Mount



EXTRACTOR FAN & LIGHT

Popular bathroom ventilation system. Motor 2.8W, 12 or 24V.
Colours: **Gold**, **White**, **Chrome**

SA1340W White 12v
SA1340G Gold 12v
SA1340C Chrome 12v

SA1340W24 White 24v
SA1340G24 Gold 24v

Sold Separately:

8018-001 Muller Vent for roof installation
SA1360 Plastic Ducting (3m)



SOLAR VENTS



Smart Ventilation: This new range of Solar Vents are perfect for both Marine and RV applications. This flexible range of Smart Vents offer a simple and easily installed solar ventilation system that will extract excess humidity and reduce condensation. The Smart Vent 300 also incorporates an integral NiMh battery that allows the Smart Vent 300 to be used at night or in poor weather. Can close off ventilation if required.

Cut Out Size 115mm
Max Depth

SA15507 Extension Collar



100 Series control panel




200 Series control panel



300 Series control panel

Description	Air In	Air Out	Stainless Cowl	Battery Back-Up
SA15503 Smart Vent 100		✓		
SA15504 Smart Vent 200S	✓	✓	✓	
SA15505 Smart Vent 300	✓	✓		✓
SA15506 Smart Vent 300S	✓	✓	✓	✓

ALL UNITS SUPPLIED IN A RETAIL BOX

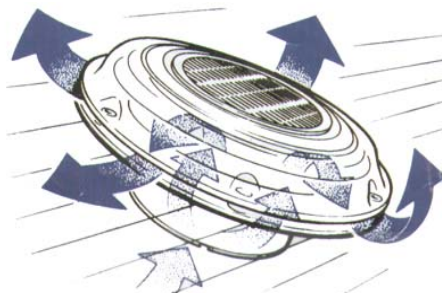

DEEP GARNISH

SA15007



SOLAR TRICKLE CHARGERS



2WATT ICP SOLAR PANEL

12 Volt

Includes built-in discharge and overcharge protection. Verify sunlight exposure by the push of a button (Blue LED). Charges your car battery via the cigarette lighter socket or Connect to your battery with clamps. Retractable wings and suction cups for window mounting
Dimensions L394mm x W127mm x D20mm

SA2650



6WATT ICP SOLAR PANEL

12 Volt

Includes built-in discharge protection. Charges your RV or boat battery via your connection of choice (complete accessory wire set included). Verify sunlight exposure by the push of a button (Blue LED). Easily install multiple panels when you need more power. Works outdoors under extreme weather conditions such as hail, snow, or elevated temperatures.

Dimensions L375mm x W360mm x D26mm

SA285



18WATT ICP SOLAR PANEL

12 Volt

Verify sunlight exposure by the push of a button (Blue LED). Constantly charges your large battery via your connection of choice, includes a complete accessory wire set. Easily install multiple panels when you need more power. Efficient under low-light and extreme outdoor weather conditions such as hail, snow, or elevated temperatures.

Dimensions L1000mm x W350mm x D30m

SA286



SOLAR BATTERY MANAGEMENT



PROSTAR CHARGE CONTROLLER

The Prostar uses a 4 stage charging system. PWM constant-voltage regulation to prevent heating and excessive gassing. Features include: low voltage warning, load short circuit & overload protection, high temperature disconnect, protection against reverse current leakage at night. Suitable for gel, sealed or flooded batteries. Suitable for 12V or 24V system.

SR-250TL 15 Amps



SEMI-FLEXIBLE SOLAR PANELS

12 Volt (2 Panels for 24v)

SM-40M	10 Watts	445 x 267
SM-60M	15 Watts	620 x 250
SM-120M	30 Watts	590 x 450
SM-160M	40 Watts	740 x 450
SM-225M	56 Watts	745 x 610



SOLARA CHARGE CONTROLLER (Regulator)

SR-60UL	4 Amps	12v
SR-135TL	8 Amps	12v
SR-170CX	10 Amps	12v/24v
SR-340CX	20 Amps	12v/24v
SR240MPP/12	16 Amps	Solar boost



SOLARA CHARGE CONTROLLER - LCD

LCD display.

SR-170LCD	10 Amps	12/24v
SR-340LCD	20 Amps	12/24v



SOLAR PANEL INSTALLTION KITSET

Kitset includes all components necessary to install solar panel:

- Solar panel
- Charge controller
- Amp meter
- Heavy duty fuse

Wiring and Mounting Brackets Not Included

SP90K Solar 90 Watt



SOLAR PANEL FUSE AND HOLDERS

SA2659F	7.5 amp Heavy Duty Fuse
SA2659H	Fuse Holder (Blade Type)



90watt SUNPOWER SOLAR PANEL

'High Output and High Efficiency'

The New Sunpower Panel is ideal for a wide range of applications where high battery-charging current from a small footprint is desirable. Our monocrystalline silicon solar cells combine higher voltage per cell with an extremely low voltage temperature coefficient to enable superior battery charging performance at high operating temperature. Exceptional low light performance and broad spectral response further enhance energy delivery in all weather conditions, year round.

A sturdy, black anodized frame with mounting holes to match the industry norm enables easy installation on currently available mounting structures

Over 5.1 amps of peak charging current

Unique back-contact solar cells with conversion efficiency up to 21.5%

Low voltage-temperature coefficient ensures maximum battery charging current is available even during high-temperature operation

Exceptional low-light performance and high sensitivity to light across the entire solar spectrum maximizes yearly charging performance in any weather

Highest quality 4mm thick high-transmission tempered glass provides enhanced stiffness and impact resistance

Aerospace style cell interconnects with in-plane strain relief provide extremely high reliability

Specifications:

L 1038mm x W 527mm x D 46mm
Weight 7.5kg

SA2658 SOLAR PANEL 90WATT 12V
SP90K SOLAR PANEL 90W KITSET



A SOLAR PANEL LIKE NO OTHER.....



SERADA